

Technical Specifications Manual for Online Testing

For Technology Coordinators

2015–2016

Published January 28, 2016

Prepared by the American Institutes for Research®



Descriptions of the operation of the Test Information Distribution Engine, Test Delivery System, and related systems are property of the American Institutes for Research (AIR) and are used with the permission of AIR.

Table of Contents

| | |
|--|-----------|
| Introduction to the Technical Specifications Manual | 1 |
| Manual Content | 1 |
| Document Conventions | 2 |
| Intended Audience | 2 |
| Other Resources | 2 |
| Section I. Network Configuration and Testing | 4 |
| Network Configuration | 4 |
| Guidance for Determining Required Bandwidth | 4 |
| Required Ports and Protocols | 5 |
| Configuration for Domain Name Resolution | 6 |
| Configuring Session Timeouts | 6 |
| Data Caching | 6 |
| Configuring Quality of Service and Traffic Shaping | 6 |
| Configuring for Certificate Revocations | 6 |
| Network Diagnostic Tools | 7 |
| AIR's Network/Bandwidth Diagnostic Tool | 7 |
| Windows-Specific Tools | 7 |
| OS X-Specific Tools | 8 |
| Multi-Platform Tools | 8 |
| Section II. Hardware Configuration | 9 |
| Connections between Printers and Computers | 9 |
| Wireless Networking and Determining the Number of Wireless Access Points | 9 |
| Hardware for Braille Testing | 10 |
| Section III. Software Configuration | 11 |
| Configuring Commercially Available Browsers | 11 |
| Enabling Pop-Up Windows | 11 |
| Requirements for Flash | 12 |
| Optimal Installation Scenario for Secure Browsers | 13 |
| Configuring Windows for Online Testing | 13 |
| Disabling Fast User Switching | 13 |
| Enabling Web Fonts in Internet Explorer 10 and 11 | 17 |
| Installing Windows Media Pack for Windows 8.1 N and KN | 18 |
| Configuring Mac OS X for Online Testing | 19 |
| Disabling Exposé or Spaces | 19 |
| Disabling Application Launches from Function Keys | 20 |

| | |
|---|-----------|
| Disabling Updates to Third-Party Apps | 21 |
| Disabling Updates to iTunes | 22 |
| Disabling Look-Up Gesture | 23 |
| Disabling Spaces and Application Launches from the Command Line | 23 |
| Disabling Spaces and Application Launches on Remote Machines | 24 |
| Configuring Linux for Online Testing | 25 |
| Adding Verdana Font..... | 25 |
| Adding Flash..... | 25 |
| Configuring Mobile Devices | 26 |
| Configuring for Guided Access on iOS..... | 26 |
| Configuring Using Autonomous Single App Mode | 27 |
| Removing the Emoji Keyboard..... | 35 |
| Enabling the Secure Browser Keyboard on Android..... | 35 |
| Installing CloudReady on PCs and Macs | 38 |
| Configurations for Braille Requirements..... | 40 |
| Section IV. Text-to-Speech Requirements..... | 41 |
| Overview of Text-to-Speech | 41 |
| Using Text-to-Speech..... | 41 |
| How the Secure Browser Selects Voice Packs..... | 41 |
| About NeoSpeech Voice Packs for Windows..... | 42 |
| Configuring Windows Text-to-Speech Settings..... | 43 |
| Configuring OS X Text-to-Speech Settings | 44 |
| Configuring Linux Text-to-Speech Settings..... | 45 |
| Text-to-Speech and Mobile Devices..... | 46 |
| Voice Packs Recognized by Desktop Secure Browsers | 46 |
| Voice Packs for Windows | 46 |
| Voice Packs for OS X | 47 |
| Voice Packs for Linux | 47 |
| Appendix A. URLs Provided by AIR | 48 |
| URLs for Non-Testing Sites..... | 48 |
| URLs for Testing Sites..... | 48 |
| TA and Student Testing Sites..... | 48 |
| Online Dictionary and Thesaurus | 49 |
| Appendix B. Technology Coordinator Checklist | 50 |
| Appendix C. Scheduling Online Testing..... | 51 |
| Number of Computers and Hours Required to Complete Online Tests | 51 |
| Sample Test Scheduling Worksheet | 51 |

Appendix D. User Support 52

List of Tables

| | |
|---|----|
| Table 1. Document Conventions..... | 2 |
| Table 2. Average Bandwidth Used by Secure Browser for Testing..... | 5 |
| Table 3. Ports and Protocols for Test Delivery System | 5 |
| Table 4. Domain Names for OCSP | 6 |
| Table 5. Recommended Ratios of Devices to Wireless Access Points | 9 |
| Table 6. Flash Requirements | 12 |
| Table 7. Profile Keys for Features in iOS 8.1.3 or Later | 28 |
| Table 8. Voice Packs on Mobile Versions of the Secure Browser | 42 |
| Table 9. Packages that Include Supported Voice Packs on Linux Distributions | 45 |
| Table 10. Voice Packs Recognized by Secure Browsers—Windows | 46 |
| Table 11. Voice Packs Recognized by Secure Browsers—OS X..... | 47 |
| Table 12. AIR URLs for Non-Testing Sites | 48 |
| Table 13. AIR URLs for Testing Sites | 48 |
| Table 14. AIR URLs for Online Dictionaries and Thesauruses..... | 49 |

Introduction to the Technical Specifications Manual

This manual provides information about hardware, software, and network configurations for running various testing applications provided by American Institutes for Research (AIR).

The *System Requirements for Online Testing* lists the minimum hardware and software requirements for online testing. Ensure your hardware complies with those requirements before undertaking the tasks described in this manual.

Manual Content




This guide contains the following sections:

- [Section I, Network Configuration and Testing](#), provides information about configuring networks, and lists helpful networking diagnostic tools.
- [Section II, Hardware Configuration](#), provides guidance regarding the proper infrastructure for printers and wireless access points (WAP).
- [Section III, Software Configuration](#), outlines configurations for operating systems (desktop, laptop, and mobile).
- [Section IV, Text-to-Speech Requirements](#), outlines configurations for enabling text-to-speech settings on desktop operating systems. This section also lists the voice packs recognized by the secure browser on those operating systems.
- [Appendix A, URLs Provided by AIR](#), lists AIR's URLs that should be whitelisted in your firewalls.
- [Appendix B, Technology Coordinator Checklist](#), lists the activities required to prepare a facility for online testing.
- [Appendix C, Scheduling Online Testing](#), provides a worksheet for estimating the required time to administer an online test.
- [Appendix D, User Support](#), explains how to contact the help desk.

Document Conventions

[Table 1](#) describes the conventions appearing in this user guide.

Table 1. Document Conventions

| Element | Description |
|---|---|
|  | Note: This symbol accompanies helpful information or reminders. |
|  | Warning: This symbol accompanies information regarding actions that may cause loss of data. |
|  | Tip: This symbol accompanies advice about performing a task efficiently. |
| text | Boldface indicates an item you click or a drop-down list selection. |
| filename | Monospaced text indicates a directory, filename, or text you enter in a field or at the command line. |

Intended Audience

This publication is intended for technology coordinators responsible for configuring the hardware, software, and network in a school's online testing environment. You should be familiar with the following concepts:

- Networking—Bandwidth, firewalls, whitelisting, and proxy servers.
- Configuring operating systems—Control Panel in Windows, System Preferences in OS X, Settings in iOS, and the Linux command line.
- Configuring web browsers—Settings in Chrome, Safari, Firefox, and Internet Explorer.

Other Resources

- For information about supported operating systems, see the *System Requirements for Online Testing*.
- For information about installing secure browsers, see the *Secure Browser Installation Manual*.
- For information about securing a computer before a test session, see the *Test Administrator User Guide*.
- For information about supported hardware and software for Braille testing as well as information about configuring JAWS see the *Braille Requirements and Testing Manual*.

The above resources as well as test administration manuals and user guides for other systems are available on the Montana Comprehensive Assessment System portal (<http://mt.portal.airast.org>).

Section I. Network Configuration and Testing

Your network's configuration has a significant impact on Test Delivery System's (TDS) performance. An improperly configured network can slow a TDS's responsiveness, and possibly impact students' scores or an assessment's integrity. The following sections provide guidance on properly configuring your network, and list popular tools for diagnosing network bottlenecks.

Network Configuration

This section provides guidance or requirements pertaining to networking configurations for online testing.

Guidance for Determining Required Bandwidth

Bandwidth is the measure of a network's capacity or utilization, usually measured in terms of bits per second. Your network should have enough bandwidth to support online testing at the required performance level. For example, if a testing program requires that web browsers display test items within 10 seconds after sending a request, then the network must have enough bandwidth to support that requirement.

In an online testing environment, the following factors contribute to determining the required bandwidth:

- **Number of Students Simultaneously Testing**—As the number of students testing at one time increases, the required bandwidth also increases.
- **Size of the Test Content**—The size of a test's content is determined by two factors: (1) the number of items on the test and (2) the average size of each item. The more items a test contains and the larger the average test item, the higher the bandwidth requirement for a given test. For example, some writing tests have a few questions to which the student composes a response, and these tests are small. In contrast, some science tests have animations or simulations; these tests are large.
- **Hubs or Switches**—LAN performance can be hindered when hubs are used instead of switches. A hub broadcasts signals from various network devices to propagate across the network, potentially saturating the network and causing traffic competition or data collisions. If you use hubs, ensure they have enough bandwidth to handle the propagation.
- **ISP Router**—For Internet networks, the most common bottleneck is the ISP's router connection, which typically operates at speeds of between 1.5M bits per second and 100M bits per second. Network administrators should spend time prior to test administration determining if their Internet infrastructure has the capacity to accommodate online testing at the required performance level.

- **Encryption**—Encryption at WAPs may contribute to bandwidth usage. If you use encryption, ensure the WAPs have enough bandwidth to prevent degradation of performance.
- **Required Response Time**—When a network's bandwidth cannot service the amount of data requested by clients, latency starts to accumulate and the students experience delays. Ensure your network's bandwidth is high enough to support the required response times between the browsers and the servers.

[Table 2](#) displays the estimated average bandwidth used by the secure browser for testing. When designing your network for online testing, ensure that the available bandwidth can support these values.

Table 2. Average Bandwidth Used by Secure Browser for Testing

| Number of Students Testing Concurrently in School or Building | Average Estimated Bandwidth Consumed During Subsequent Startup of Secure Browser ^a | Average Estimated Bandwidth Consumed During Testing ^b |
|---|---|--|
| 1 | 8K bits/second | 5–15K bits/second |
| 50 | 400K bits/second | 250–750K bits/second (0.25–0.75M bits/second) |
| 100 | 800K bits/second | 500–1500K bits/second (0.5–1.5M bits/second) |

^a Bandwidth consumed when opening the secure browser and accessing an assessment for the first time is significantly more than when opening the secure browser and accessing an assessment subsequently. This is because the initial launch of the secure browser downloads non-secure cacheable content (not test content) that can be immediately accessed upon opening the secure browser later.

^b The values in this column are based on averages from tests in a variety of subjects.

Required Ports and Protocols

[Table 3](#) lists the ports and protocols used by the Test Delivery System. Ensure that all content filters, firewalls, and proxy servers are open accordingly.

Table 3. Ports and Protocols for Test Delivery System

| Port/Protocol | Purpose |
|---------------|--------------------------------|
| 80/TCP | HTTP (initial connection only) |
| 443/TCP | HTTPS (secure connection) |

Configuration for Domain Name Resolution

[Appendix A, URLs Provided by AIR](#), lists the domain names for AIR's testing and non-testing applications. Ensure the testing machines have access to a server that can resolve those names.

Configuring Session Timeouts

Session timeouts on proxy servers and other devices should be set to values greater than the average time it takes a student to participate in a test session or to complete a given test. For example, if your school determines that students will test in 60-minute sessions, then consider setting the session timeout to 65 or 70 minutes.

Data Caching

Data caching is a technique by which an intermediate server checks if it can serve the client's requests instead of a downstream server. While data caching is a good strategy in some situations, its overhead is detrimental in the online testing environment. Ensure all intermediate network elements, such as proxy servers, do not cache data.

Configuring Quality of Service and Traffic Shaping

If your testing network includes devices that perform traffic shaping, packet prioritization, or Quality of Service (QoS), ensure the URLs in [Appendix A, URLs Provided by AIR](#), have high priority.

Configuring for Certificate Revocations

AIR's servers present certificates to the clients. The following sections discuss the methods used to check those certificates for revocation.

Certificate Revocation List

To use a certificate revocation list, ensure your firewalls allow the URL <http://crl.verisign.com/>.

Online Certificate Status Protocol

To use the Online Certificate Status Protocol (OCSP), ensure your firewalls allow the domain names listed in [Table 4](#). The values in the Patterned column are preferred because they are more robust.

Table 4. Domain Names for OCSP

| Patterned | Fully Qualified |
|-------------------|----------------------|
| *.thawte.com | ocsp.thawte.com |
| *.geotrust.com | ocsp.geotrust.com |
| *.ws.symantec.com | ocsp.ws.symantec.com |

If your firewall is configured to check only IP addresses, do the following:

1. Get the current list of OCSP IP addresses from Symantec. The list is available at https://forms.symantec.com/websurveys/servlet/ActionMultiplexer?Action_ID=ACT2000&WSD_surveyInfoID=2177.
2. Add the retrieved IP addresses to your firewall's whitelist. Do not replace any existing IP addresses.

Network Diagnostic Tools

You should do a performance analysis of your networking infrastructure to identify any bottlenecks that may impact test performance. The choice of diagnostic tool depends on the operating system running the tool, the network administrator's technical knowledge, and the desired level of network analysis. A number of network diagnostic tools are available, as described in the following sections.

AIR's Network/Bandwidth Diagnostic Tool

AIR provides a diagnostic tool that can be directly accessed from the student Practice and Training Site test login page.

1. On the Practice and Training Site test login page, click **Run Diagnostics**. The Diagnostic Screen page opens.
2. In the *Network Diagnostics* section, select a test.
3. Select the approximate number of students who may take that test *at one time*.
4. Click **Run Network Diagnostics Tests**.

The tool displays your current upload and download speed as well as a general idea of whether you can reliably test the number of students you entered in step [3](#). You may want to run this test several times throughout the day to verify that your upload and download speeds remain relatively consistent.

Windows-Specific Tools

PRTG Traffic Grapher

PRTG (www.paessler.com/prtg) monitors bandwidth usage and other network parameters via Simple Network Management Protocol (SNMP). It also contains a built-in packet sniffer. A freeware version is available.

NTttcp

NTttcp (www.microsoft.com/whdc/device/network/TCP_tool.msp) is a multithreaded, asynchronous application that sends and receives data between two or more endpoints and reports the network performance for the duration of the transfer.

Pathping

Pathping is a network utility included in Windows. It combines the functionality of the ping and traceroute commands by providing details of the path between two hosts and ping-like statistics for each node in the path based on samples taken over a time period.

OS X-Specific Tools

Network Utility.app

This tool is built into OS X.

Multi-Platform Tools

Wireshark

Wireshark (www.wireshark.org) is a network protocol analyzer. It has a large feature set and runs on most platforms including Windows, OS X, and Linux.

TCPDump

TCPDump (<http://sourceforge.net/projects/tcpdump>) is a common packet sniffer that runs from the command line on Linux and OS X. It can intercept and display data packets being transmitted or received over a network. A Windows version WinDump is available (www.winpcap.org/windump/).

Ping, NSLookup, Netstat, Traceroute

This is a set of standard UNIX network utilities. Versions of these utilities are included in Linux, Windows, and OS X.

Iperf

Iperf (<http://sourceforge.net/projects/iperf/>) measures maximum TCP bandwidth, allowing the tuning of various parameters and User Datagram Protocol (UDP) characteristics. Iperf reports bandwidth, delay jitter, and datagram loss.

Section II. Hardware Configuration

This section provides topology guidance for printers and WAPs. It also provides a reference for hardware configurations that support Braille testing.

Connections between Printers and Computers

Test Administrators can print test session information and approve students' requests to print stimuli or test items (for students with the print-on-request accommodation). Nevertheless, to maintain a secure test environment, the Test Administrator's computer should be connected to a single local or network printer in the testing room, and only the Test Administrator's computer should have access to that printer.

Wireless Networking and Determining the Number of Wireless Access Points

Wireless networking standards have evolved over the years, with the following being the most commonly deployed:

- 802.11ac has a theoretical throughput of up to 1G bits per second.
- 802.11n has a throughput of up to 300M bits per second.
- 802.11g has a theoretical throughput of up to 54M bits per second.
- 802.11b has a theoretical throughput of 11M bits per second.

The recommended number of devices supported by a single wireless connection depends on the standard used for the connection. The two most common networking standards are 802.11g (54Mbps) and 802.11n (300Mbps). [Table 5](#) lists recommendations for network topology in which the WAP provides 802.11g and the testing devices provide 802.11g, 802.11n, or a mixture of the two. Refer to your WAP documentation for specific recommendations and guidelines for these or other standards.

Table 5. Recommended Ratios of Devices to Wireless Access Points

| Testing Device | Ratio of Devices to 802.11g WAP | Ratio of Devices to 802.11n WAP |
|----------------------------|---------------------------------|---|
| 802.11g | 20 | 40 |
| 802.11n | 20 | 40 |
| Mix of 802.11g and 802.11n | 20 | 40–50 (depending on the mix of wireless cards used) |

Recommendations for 802.11ac routers are under investigation.

Regardless of the number of WAPs, each should be configured to use WPA2/AES data encryption.

Hardware for Braille Testing

For information about Braille hardware and software requirements, refer to the *Braille Requirements* document, which is available on the Montana Comprehensive Assessment System portal (<http://mt.portal.airast.org>).

Section III. Software Configuration

This section describes how to configure the operating systems and web browsers for online testing.

Configuring Commercially Available Browsers

This section describes how to configure commercially available browsers (Chrome, Safari, Firefox, and Internet Explorer) for online testing.

Enabling Pop-Up Windows

AIR's systems provide informational messages or warnings using pop-up windows. Therefore, enable pop-up windows on those web browsers using AIR's systems.

The following list describes how to enable pop-up windows on many browsers. If your browser is not on this list, consult its user documentation.

Enabling Pop-Up Windows for All Domains

The following instructions enable pop-up windows for *all domains*. If you prefer to limit pop-up windows to only those coming from AIR's domains, use the instructions in [Enabling Pop-Up Windows only for AIR domains](#).

- **Firefox (Windows):** Tools > Options > Content > clear **Block pop-up windows**. (Firefox on OS X and Linux is similar.)
- **Chrome:** Menu > Settings > Show advanced settings (at the bottom of the screen) > Privacy > Content Settings > Pop-ups > mark **Allow all sites to show pop-ups**.
- **Chrome browser on Android tablets:** Menu > Settings > Advanced > Content Settings > Block pop-ups > clear checkbox.
- **Internet Explorer:** Internet Options > Privacy tab > clear **Turn On Pop-up Blocker**.
- **Safari:** Safari > clear **Block Pop-Up Windows**.
- **iOS Safari:** Settings > Safari > Block Pop-ups (toggle to "off" mode).

Enabling Pop-Up Windows only for AIR domains

You can allow pop-up windows only from AIR's domains. The following list describes how to enable domain-specific pop-up windows on many browsers. If your browser is not on this list, consult its user documentation. The list of AIR domains to use in these instructions appears in [Appendix A, URLs Provided by AIR](#).

- **Firefox:** Tools > Options > Content > click **Exceptions**. Enter domain names and select **Allow** for each.
- **Chrome:** Menu > Settings > Show advanced settings (at the bottom of the screen) > Privacy > Content Settings > Pop-ups > click **Manage Exceptions**. Enter the domain names and select **Allow** for each.
- **Internet Explorer:** Internet Options Privacy tab > Settings. Enter the domain names and click **Add** for each.
- **Safari and iOS Safari:** N/A
- **Chrome on Android tablets:** N/A

Requirements for Flash

Some test items require Flash. [Table 6](#) lists the requirements for installing Flash on the testing computers.

Table 6. Flash Requirements

| Browser | Flash Requirement |
|----------------------------------|---|
| Secure browser 8.0 and later | Flash included in the browser. In addition, consider installing your operating system's version of Flash to increase reliability. Flash is available from https://get.adobe.com/flashplayer/ . |
| Secure browser 7.0 | Install Flash for your operating system, or install the Flash plug-in for the browser. |
| Secure browser 6.5 | Flash bundled in the secure browser installation pack. |
| Commercial browser* with HTML5 | Flash included in the browser, no need for additional installation. |
| Commercial browser* before HTML5 | Install Flash for your operating system, or install the Flash plug-in for the browser. |

*Commercial browsers—the versions of Internet Explorer, Firefox, Chrome, Safari, and mobile browsers listed in the *Online System Requirements*.

Optimal Installation Scenario for Secure Browsers

The *Secure Browser Installation Manual* describes several scenarios for installing the secure browser. Some scenarios describe how to install the secure browser into a shared network folder, and students run the secure browser from that folder. This is arguably the fastest way to deploy the secure browser in a testing environment, but there are some performance impacts. Running the secure browser creates competition among the students' clients for two resources: LAN bandwidth and shared disk drive. This performance impact can be avoided by installing the secure browser locally on each machine.

Configuring Windows for Online Testing

This section describes how to configure Windows for online testing.


Disabling Fast User Switching

Microsoft Windows (XP, Vista, 7, 8.0, 8.1, and 10) has a "Fast User Switching" feature that allows more than one user to be logged in at the same time. This is a security risk because students can potentially start a new Windows session during the test and use that session to search the Internet for answers. The following sections describe how to disable Fast User Switching for different versions of Windows. (There is no need to manually disable Fast User Switching on Windows 10.)

Disabling Fast User Switching in Windows XP

This section describes how to disable Fast User Switching under Windows XP. This configuration is not necessary if the test machine is joined to a domain, because Fast User Switching is not available in that scenario.

1. Open the Control Panel, and switch to classic view.
2. Click **User Accounts**.
3. Click **Change the Way Users Log On or Off**.
 - a. Mark the **Use the Welcome Screen** checkbox.
 - b. Clear the **Use Fast User Switching** checkbox.
4. Click **Apply Options**.

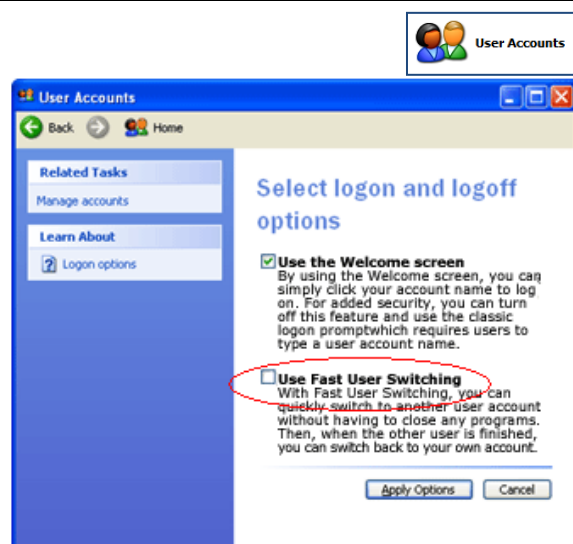


Disabling Fast User Switching in Windows Vista and 7

This section describes how to disable Fast User Switching under Windows Vista and Windows 7. The process is similar for later versions of Windows.

Option A: Access the Group Policy Editor

The following procedure describes how to disable Fast User Switching using the Group Policy Editor. Some editions of Windows Vista do not support this configuration through the Group Policy Editor; in such cases, configure Fast User Switching through the registry. See Option B below for instructions.


1. Click **Start**, type `gpedit.msc` in the search box.
The Local Group Policy Editor window appears.
2. Navigate to **Local Computer Policy > Computer Configuration > Administrative Templates > System > Logon**.
3. Double-click **Hide entry points for Fast User Switching**.
4. Select **Enabled**, and click **OK**.
5. Close the Local Group Policy Editor window.

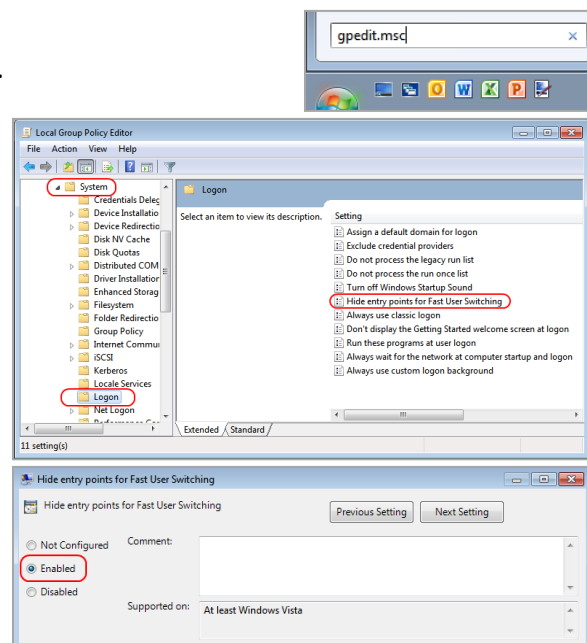

Option B: Access the Registry

The following procedure describes how to disable Fast User Switching using the Windows registry.


1. Click **Start**, type `regedit.exe` in the **Start Search** dialog box, and press **Enter**.
2. Navigate to `HKEY_LOCAL_MACHINE > SOFTWARE > Microsoft > Windows > CurrentVersion > Policies > System`.
3. Right-click the **System** folder.
4. Click **New, DWORD (32-bit) value**.
5. Type `HideFastUserSwitching` and press **Enter**.
6. Double-click the **HideFastUserSwitching** value.
7. In the **Value data** field, enter `1`.
8. Click **OK**.
9. Close the Registry Editor.

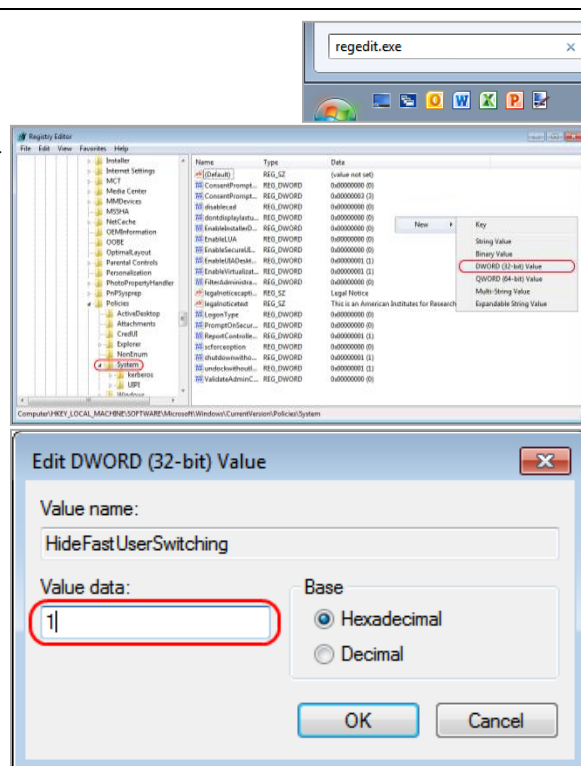


Disabling Fast User Switching in Windows 8.0 and 8.1

The following procedure describes how to disable Fast User Switching under Windows 8.0 and 8.1.


1. In the Search charm, type `gpedit.msc`. Double-click the `gpedit` icon in the Apps pane. The Local Group Policy Editor window opens.
2. Navigate to `Computer Configuration > Administrative Templates > System > Logon`.
3. In the Setting pane, double-click **Hide entry points for Fast User Switching**.

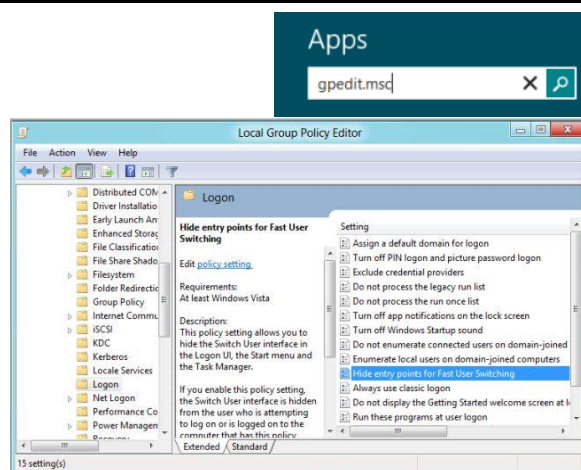

4. Select **Enabled** and then click **OK**.

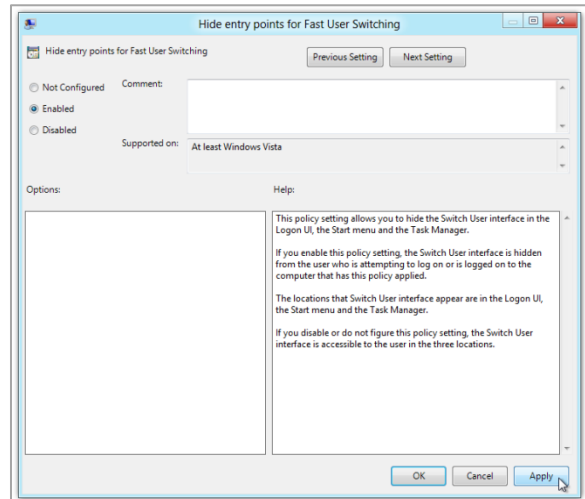

5. In the Search charm, type run. The Run dialog box opens.
6. Enter the command `gpupdate /force` into the text box and then click **OK**. (Note the space before the backslash.)

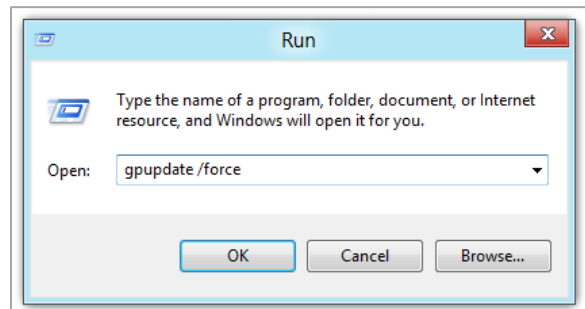

7. The command window opens. When you see the message Computer Policy update has completed successfully, this will be your notification that Windows has successfully disabled Fast User Switching.




Enabling Web Fonts in Internet Explorer 10 and 11


Some applications, such as Practice and Training Site tests or THSS, display test items that may require web fonts. The following procedure describes how to enable web fonts in Internet Explorer 10 or 11.

To enable web fonts in Internet Explorer:

1. In Internet Explorer, open the tools menu and select **Internet Options**. The Internet Options dialog box opens.
2. Click the **Security** tab.
3. Click the **Custom Level** button. The Security Settings dialog box opens.

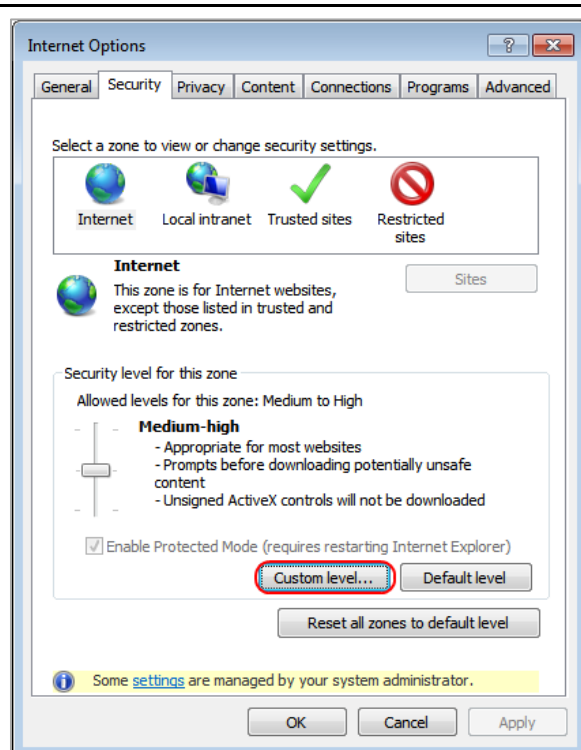

4. Scroll to Font Download and mark the **Enable** radio button.
5. Click **OK**. The Security Settings dialog box closes.
6. Click **OK**. The Internet Options dialog box closes.

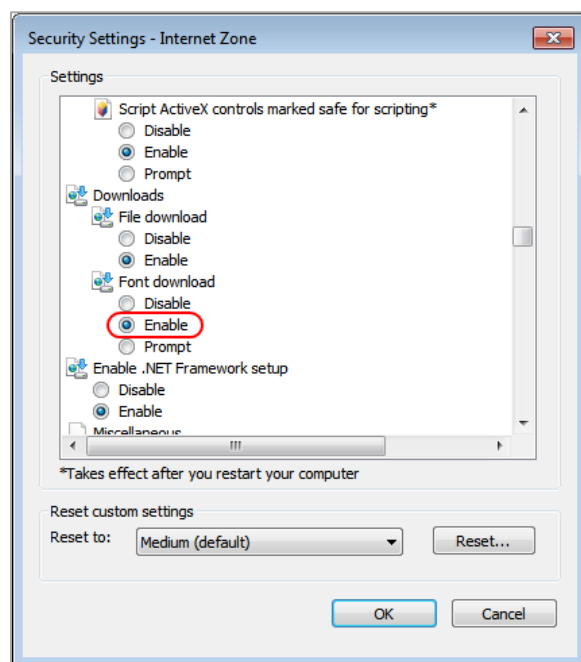

Installing Windows Media Pack for Windows 8.1 N and KN

Some versions of Windows 8.1 are not shipped with media software installed. As a result, you may need to install software to enable students to listen to and record audio as well as watch videos.

Microsoft provides additional information as well as a download package for computers with the following Windows 8.1 versions:

- Windows 8.1 N
- Windows 8.1 N/K with Bing
- Windows 8.1 Enterprise N
- Windows 8.1 Pro N
- Windows 8.1 Pro N/K for EDU

AIR encourages downloading this software and ensuring it works with sample websites and video and audio files prior to installing the Windows secure browser. Installation instructions are provided on Microsoft's download page.

Microsoft Resources:

- [About the Media Feature Pack for Windows 8.1 N and Windows 8.1 KN Editions: April 2014](http://support.microsoft.com/kb/2929699/en-us)
(<http://support.microsoft.com/kb/2929699/en-us>)
- [Download Media Feature Pack for N and KN Versions of Windows 8.1](http://www.microsoft.com/en-us/download/details.aspx?id=42503)
(<http://www.microsoft.com/en-us/download/details.aspx?id=42503>)

Configuring Mac OS X for Online Testing

This section describes how to configure Mac OS X for online testing.

Disabling Exposé or Spaces


Mac OS X 10.6 through 10.11 includes an Exposé or Spaces feature that allows running more than one desktop session. This is a security risk because students can potentially start a new desktop session during the test, and use that session to search the Internet for answers. The following procedure explains how to disable Exposé or Spaces on those versions of OS X. (You can disable Spaces quickly from the command line; see [Disabling Spaces and Application Launches from the Command Line](#) for details.)

To disable Exposé or Spaces:


1. Choose Apple menu > **System Preferences**.




2. Click **Keyboard**. The Keyboard window opens.




3. Click the **Keyboard Shortcuts** or **Shortcuts** tab.

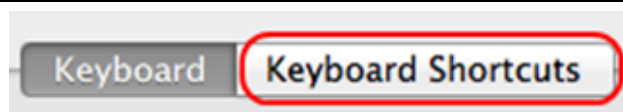

4. For OS X 10.6 do the following (otherwise skip to step 5):
 - a. In the left panel, click **Exposé & Spaces**. The right panel lists the Exposé options.
 - b. In the right panel, clear all the checkboxes.

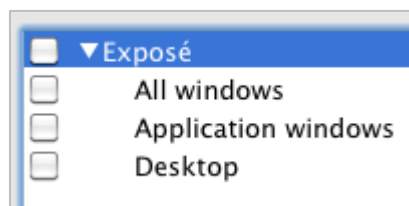

5. For OS X 10.7 and later, do the following:
 - a. In the left panel, click **Mission Control**. The right panel lists all Mission Control options.
 - b. In the right panel, clear the following checkboxes:
 - Move left a space
 - Move right a space
 - Switch to Desktop 1

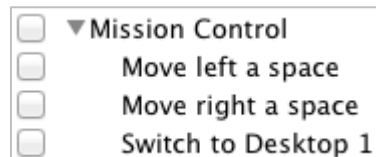

To re-enable Exposé or Spaces, follow steps [1–5](#), and mark the boxes for spaces.

Disabling Application Launches from Function Keys

When students use the secure browser for testing, the Test Delivery System conducts regular checks to ensure that other applications are not open. These checks help maintain the integrity of the secure test environment.

Starting with OS X versions 10.6 and later, some Mac computers are factory configured to launch iTunes and other applications by pressing the function keys (e.g., F8) on the keyboard. If a student accidentally presses the function key, the secure browser assumes that a forbidden application is running and pauses the student's test. To avoid this scenario, disable the use of function keys to launch applications.

The following instructions are based on OS X 10.9; similar instructions apply for other versions of OS X. (You can disable application launches quickly from the command line; see [Disabling Spaces and Application Launches from the Command Line](#) for details.)


To disable application launches from function keys:

1. Choose Apple menu > **System Preferences**.
2. In System Preferences, click **Keyboard**. The Keyboard window opens.



3. In the Keyboard window, mark **Use all F1, F2, etc. keys as standard function keys**.

If you need to launch iTunes or another application, press the Fn key and then press the desired function key. This combination will launch the application. (Doing so while taking a test causes the secure browser to pause the test.)

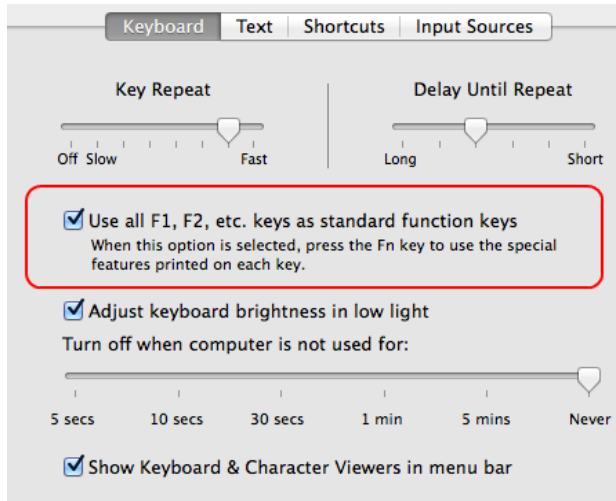


Disabling Updates to Third-Party Apps

Updates to third-party apps may include components that compromise the testing environment. This section describes how to disable updates to third-party apps.

The following instructions are based on OS X 10.9; similar instructions apply for other versions of OS X.

To disable updates to third-party apps:

1. Log in to the student's account.
2. Choose Apple menu > **System Preferences**. The **System Preferences** dialog box opens.
3. Click **App Store**. The **App Store** window opens.
4. Mark **Automatically check for updates**.
5. Clear **Download newly available updates in the background**.
6. Clear **Install app updates**.
7. Mark **Install system data files and security updates**.

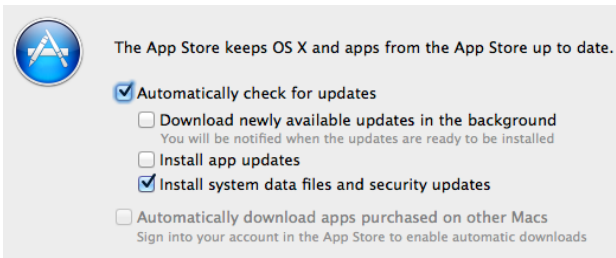


Disabling Updates to iTunes

Updates to iTunes may be incompatible with the secure browser. This section describes how to disable updates to iTunes.

The following instructions are based on OS X 10.9; similar instructions apply for other versions of OS X.

To disable updates to iTunes:

1. Log in to the student's account.
2. Start iTunes.
3. Select **iTunes > Preferences**.
4. Under the **Advanced** tab, clear **Check for new software updates automatically**.
5. Click **OK**.

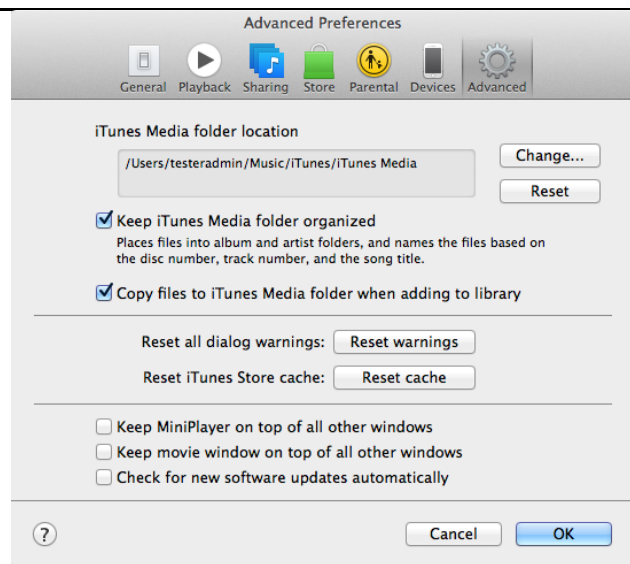


Disabling Look-Up Gesture

OS X versions 10.7 and later include a look-up gesture; highlighting a word and then tapping with three fingers on the trackpad displays a dictionary for the highlighted word—a feature that can comprise testing security. This section describes how to disable the look-up gesture.

The following instructions are based on OS X 10.9; similar instructions apply for other versions of OS X.

To disable the look-up gesture:

1. Choose Apple menu > **System Preferences**.
2. Click **Trackpad**. The Trackpad window opens.
3. Click the **Point and Click** tab.
4. Clear the **Look up** checkbox.

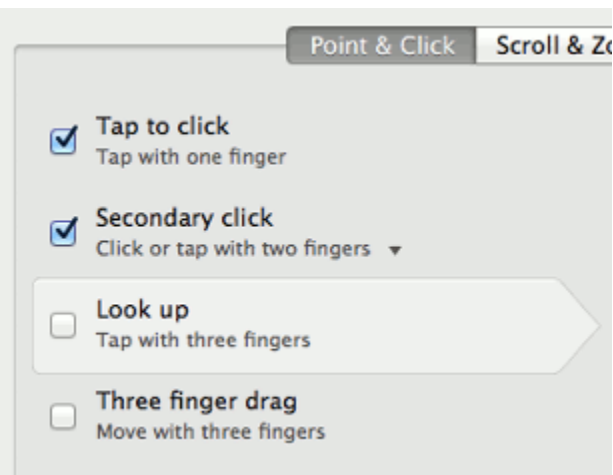

Disabling Spaces and Application Launches from the Command Line

The sections [Disabling Exposé or Spaces](#) and [Disabling Application Launches from Function Keys](#) describe how to configure OS X through the desktop. This section describes how to perform those configurations from the command line, which can be faster than working through the desktop. To perform this task, you need to be familiar with logging in to OS X machines through Terminal or other terminal emulator.

To disable spaces and application launches from the command line:

1. Log in to the machine as the user that runs the secure browser.
2. Enter the following commands:

```
defaults write com.apple.symbolichotkeys AppleSymbolicHotKeys -dict-add 79
"{enabled = 0; value = {parameters = (65535,123, 262144); type = standard; }; }"

defaults write com.apple.symbolichotkeys AppleSymbolicHotKeys -dict-add 80
"{enabled = 0; value = { parameters = (65535, 123, 393216); type = 'standard'; };
}"
```

```
defaults write com.apple.symbolichotkeys AppleSymbolicHotKeys -dict-add 81  
"{enabled = 0; value = { parameters = (65535, 124, 262144); type = 'standard'; };  
}"  
  
defaults write com.apple.symbolichotkeys AppleSymbolicHotKeys -dict-add 82  
"{enabled = 0; value = { parameters = (65535, 124, 393216); type = 'standard'; };  
}"
```



TIP You can paste these lines into a text file, and run the file from the command line.

These commands modify the file `~/Library/Preferences/com.apple.symbolichotkeys.plist`.

3. If you logged in to a computer running OS X 10.8.5 or later, log out and then log back in.

If you need to restore Spaces and the default application launchers, repeat steps [1–3](#). In step [2](#), change `enabled = 0` to `enabled = 1`.

Disabling Spaces and Application Launches on Remote Machines

The sections [Disabling Exposé or Spaces](#), [Disabling Application Launches from Function Keys](#), and [Disabling Spaces and Application Launches from the Command Line](#) describe procedures for configuring a secure test environment in OS X. This configuration is stored in the file `~/Library/Preferences/com.apple.symbolichotkeys.plist`. If you have many OS X testing machines, it may be easier to push this file to those machines instead of configuring each one individually.

You can push the configuration file to remote machines using a variety of tools, such as the following:

- File Distributor
- Apple’s Active Directory Client and Directory Utility
- Apple’s Open Directory and Profile Manager
- Centrify & PowerBrokers Identity Enterprise
- Apple Remote Desktop

Configuring Linux for Online Testing

This section describes how to configure Linux for online testing.

Adding Verdana Font

Some tests have content that requires the Verdana TrueType font. Therefore, ensure that Verdana is installed on Linux machines used for testing. The easiest way to do this is to install the Microsoft core fonts package for your distribution.

- Fedora, Red Hat, and openSUSE—Follow the steps in the “How to Install” section of the following website: <http://corefonts.sourceforge.net/>.
- Ubuntu—In a terminal window, enter the following command to install the msttcorefonts package:

```
sudo apt-get install msttcorefonts
```

Adding Flash

If your distribution or web browser does not come with Flash, you need to install it. See your distribution’s documentation for details.

Configuring Mobile Devices

This section describes how to configure mobile devices for online testing.

Configuring for Guided Access on iOS

Guided Access restricts the iOS to a single application and prevents taking screenshots. This ensures a secure test environment. (You may want to use Single App mode, which is easier to enable and activate than Guided Access; for more details about this configuration, see [Configuring Using Autonomous Single App Mode.](#))

The procedure in this section only *enables* Guided Access; to *activate* Guided Access before a test, see the *Test Administrator User Guide*.

To configure for Guided Access:

1. Tap **Settings**.




2. Navigate to General > Accessibility > Learning, and turn on **Guided Access**.
3. Set the passcode for Guided Access. (Test Administrators use this passcode to deactivate Guided Access after a test.)
 - a. Tap **Set Passcode**.
 - b. Enter a passcode.
 - c. Confirm the passcode.
4. Save the passcode in a safe place. There is no ability to retrieve a forgotten passcode.



-
5. On devices with iOS 7 or later, disable keyboard functions by doing the following:

- a. Under **Settings**, tap **General > Keyboard**.
- b. Turn off all settings.

Figure 1. Keyboard Settings for iOS 8.1 (other versions of iOS are similar)

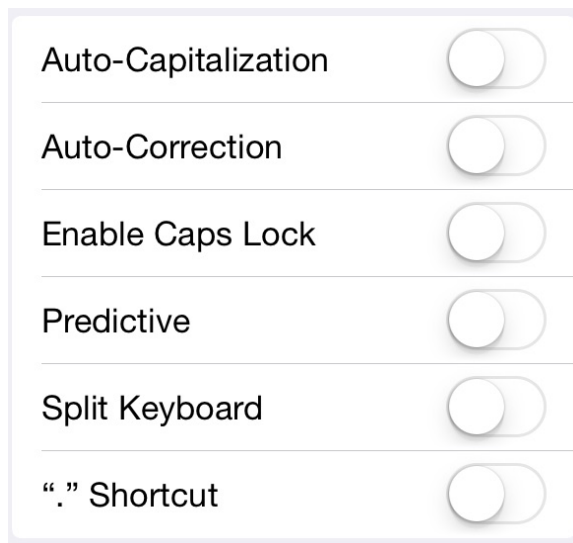

Configuring Using Autonomous Single App Mode

If you have iOS tablets running version 7.1 or higher, and if you have a Mac running version 10.10 or higher, then you can use Autonomous Single App Mode (ASAM) to quickly create a secure testing environment on all iPads used for testing. (Tablets running a version earlier than 7.1 require Guided Access; for details about this configuration, see [Configuring for Guided Access on iOS](#).) Compared to Guided Access, ASAM requires less time to prepare for test sessions; there is no need to activate Guided Access on each iPad before each test session.

Overview of Autonomous Single App Mode and the Secure Testing Environment

To manage multiple iPads using ASAM, you need to do the following:

[Step 1: Creating a Mobile Device Management Profile](#)

[Step 1a \(Optional\): Restricting Features in iOS 8.1.3 or later](#)

[Step 2: Creating a Supervisory Profile](#)

[Step 3: Placing iPads in Autonomous Single App Mode](#)

After completing these three steps, each time a student starts a test, the iPad enters ASAM and the test environment is secure.

Step 1: Creating a Mobile Device Management Profile

The first step in provisioning iPads with ASAM is to create an MDM profile. Any profile with default settings is compatible with the secure browser. However, you may wish to restrict

certain features in devices with iOS 8.1.3 or later (see [Step 1a \(Optional\): Restricting Features in iOS 8.1.3 or later](#)). Deploy the profile to a host that the iPads can access.

Creating an MDM profile is beyond the scope of this specification manual. The following references provide introductory information:

- *IT in the Classroom*, available at <https://www.apple.com/education/it/mdm/>.
- *Apple Configurator Help*, available at <https://help.apple.com/configurator/mac/2.0/>.
- *Pro tip: Use OS X Server Profile Manager for MDM*, available at <http://www.techrepublic.com/article/pro-tip-use-os-x-server-profile-manager-for-mdm/>.

Step 1a (Optional): Restricting Features in iOS 8.1.3 or later

You can restrict features in supervised devices with iOS 8.1.3 or later that may give students an unfair testing advantage, including the dictionary, predictive keyboard, spell check, and auto-correction. If you wish to restrict any of these features, you may do so when creating the MDM profile for these devices.



Note: The current version of Apple Configurator does not allow you to restrict these features. If you wish to restrict these features when configuring the MDM profile, you must use a third-party MDM solution.

To restrict features in iOS 8.1.3 or later:

- In the Custom Settings section of the MDM solution, insert the profile key for each feature you wish to restrict. [Table 7](#) provides a list of the relevant profile keys.

Table 7. Profile Keys for Features in iOS 8.1.3 or Later

| Feature | Profile Key | Recommended Value |
|--|--|-------------------|
| Dictionary, Share Selected Text ^a | <key>allowDefinitionLookup</key> | False |
| Predictive Keyboard | <key>allowPredictiveKeyboa rd</key> | False |
| Spell Check | <key>allowSpellCheck</key> | False |
| Auto-Correction | <key>allowAutoCorrection</ key> | False |

^a Share Selected Text is available since iOS 9. Disabling Dictionary also disables this feature.

The following snippet turns off the iPad's auto-correction feature. The snippets for dictionary, predictive keyboard, and spell check are similar.

```
<dict>
  <key>allowAutoCorrection</key>
  <false />
  <key>PayloadDisplayName</key>
  <string>Restrictions</string>
  <key>PayloadDescription</key>
  <string>RestrictionSettings</string>
  <key>PayloadIdentifier</key>
  <string>31eb53ac-3a08-46f7-8a0a-82e872382e15.Restrictions</string>
  <key>PayloadOrganization</key>
  <string></string>
  <key>PayloadType</key>
  <string>com.apple.applicationaccess</string>
  <key>PayloadUUID</key>
  <string>56199b2c-374d-4152-bc50-166d21fa9152</string>
  <key>PayloadVersion</key>
  <integer>1</integer>
</dict>
```


Step 2: Creating a Supervisory Profile

To create a supervisory profile:

1. On a Mac 10.10, download and install Apple Configurator from the Mac App Store. When the installation completes, open Apple Configurator.

2. Click **Prepare**, then **Settings**. The Settings window appears.

Figure 2. Settings Window in Apple Configurator

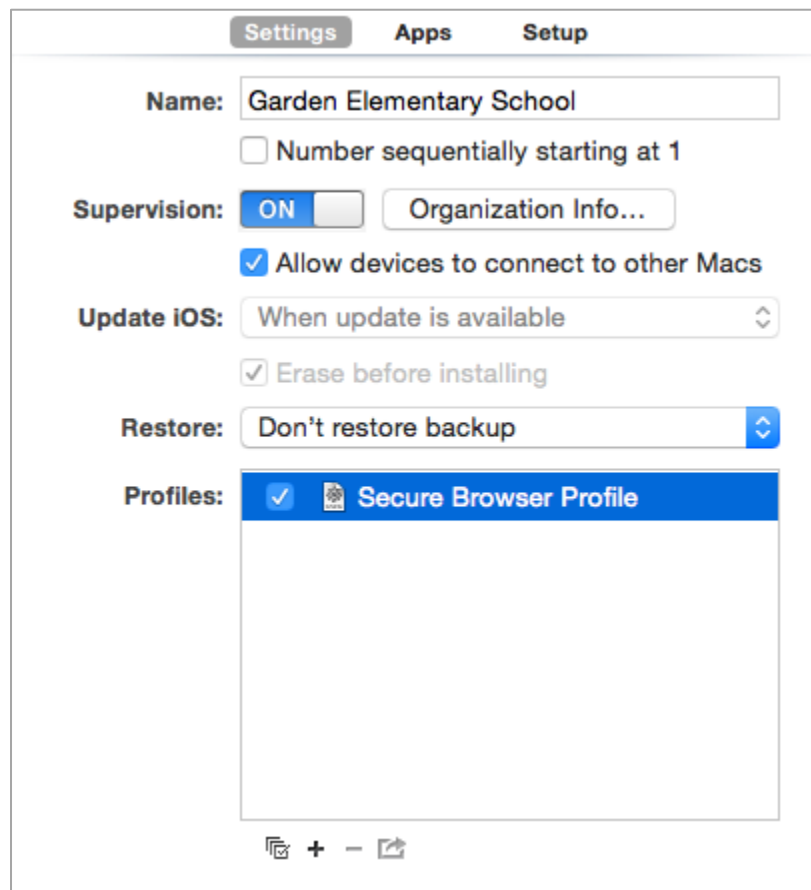


- Click **+** below the Profiles list and select **Create New Profile....** A configuration window appears.

The screenshot shows a configuration window for creating a new profile. On the left is a sidebar with a list of settings, each with an icon and a status: 'General' (Mandatory), 'Passcode' (Not configured), 'Restrictions' (Not configured), 'Global HTTP Proxy' (Not configured), 'Content Filter' (Not configured), 'Domains' (Not configured), 'Wi-Fi' (Not configured), 'VPN' (Not configured), 'AirPlay' (Not configured), and 'AirPrint'. The main panel is titled 'General' and contains the following sections:

- Name:** Display name of the profile (shown on the device). The text 'Secure Browser Profile' is entered in the field.
- Organization:** Name of the organization for the profile. The text '[optional]' is entered in the field.
- Description:** Brief explanation of the contents or purpose of the profile. The text '[optional]' is entered in the field.
- Consent Message:** A message that will be displayed during profile installation. The text '[optional]' is entered in the field.

At the bottom right of the window are two buttons: 'Cancel' and 'Save'.

- In the **General** section, in the *Name* field, enter a name for the profile.
- In the **Restrictions** section, click **Configure**. A list of restrictions appears.
- Make any required changes to the restrictions, or retain the default settings.
- Click **Save**. You return to the Settings tab, and the profile appears in the Profiles list.
- Click  to export the profile to the Mac.

Creation of the supervisory profile is complete.


Step 3: Placing iPads in Autonomous Single App Mode



TIP: Installing on multiple iPads at once Before starting this procedure, connect the iPads to the Mac through a USB hub. That way you can perform the installation on many of them at one time.


To install the MDM profile, supervisory profile, and secure browser:

1. On the Mac where you performed [Step 2: Creating a Supervisory Profile](#), open the Apple Configurator.
2. From the **Apple Configurator** menu, select **Preferences**. The **Preferences** window opens.

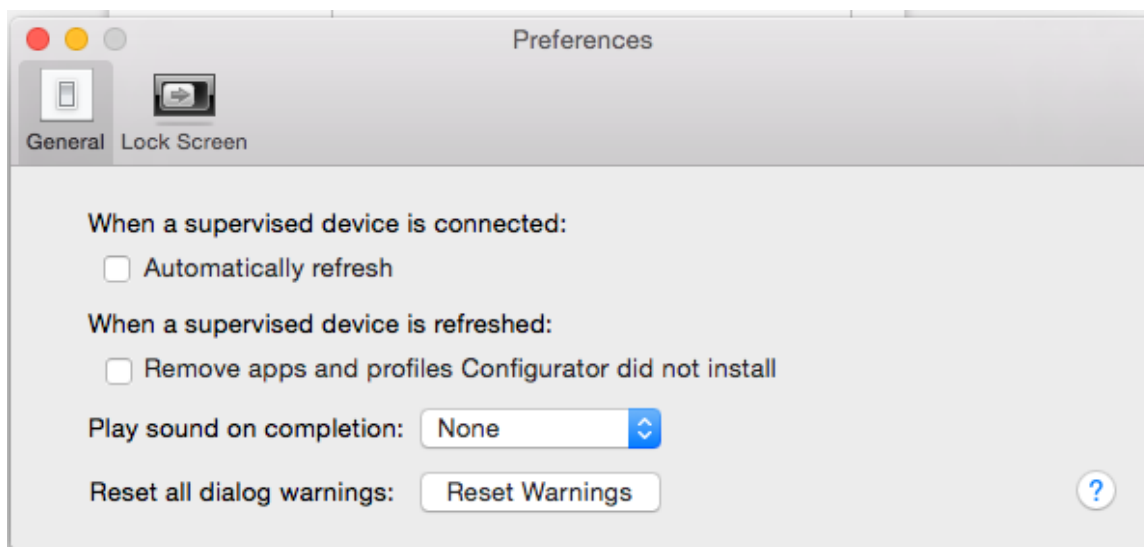

3. Under **General**, clear the **Automatically refresh** and **Remove apps and profiles Configurator did not install** checkboxes.
4. Close the **Preferences** window.
5. Back in Apple Configurator, click **Prepare**, then **Settings**. The Settings window appears (see [Figure 2](#)).
6. In the *Name* field, enter a name to apply to the iPads.
7. *Optional:* Mark the **Number sequentially starting at 1** checkbox. This adds a number to each iPad's name. For example, if the Name field is Garden Elementary School, and if three iPads are connected, each device receives the name Garden Elementary School 1, Garden Elementary School 2, and Garden Elementary School 3.
8. Set *Supervision* to **On**.

9. Click **Organization Info...** The **Organization Info** window appears.

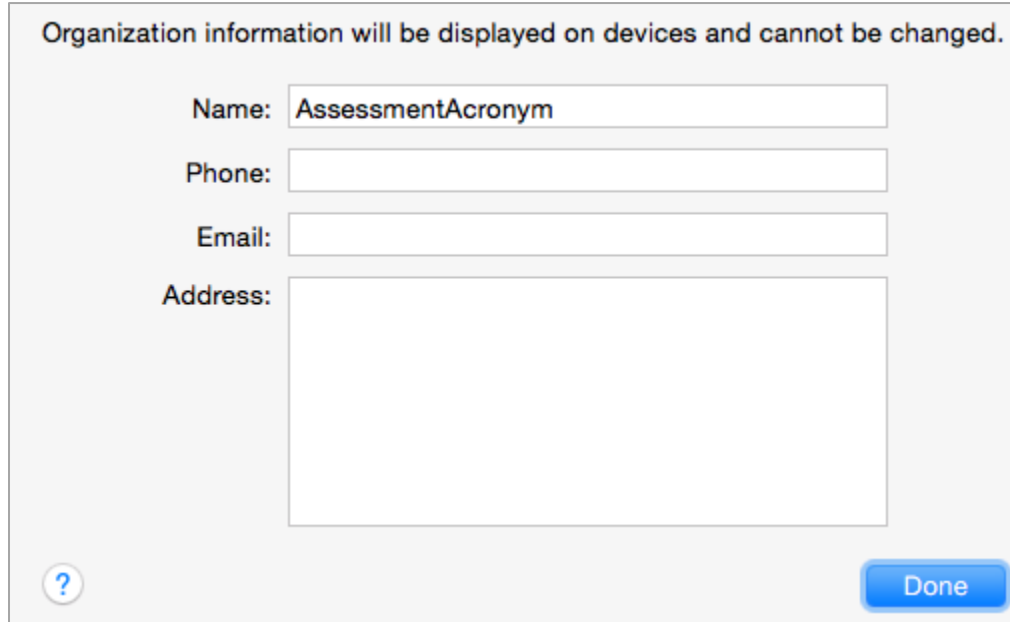

Organization information will be displayed on devices and cannot be changed.

Name: AssessmentAcronym

Phone:

Email:


Address:

?

Done

10. In the *Name* field, enter MontCAS and then click **Done**. The **Organization Info** window closes.
11. If the profile you created in [Step 2: Creating a Supervisory Profile](#) does not appear in the Profiles list, import it by doing the following:
- Click **+** below the Profiles list and select **Import Profile....**
 - Navigate to the profile you saved in step [8](#) on page [31](#), and then click **Open**.
12. Mark the checkbox for the profile you want to prepare onto the iPads (see [Figure 2](#)).
13. Connect each iPad to the Mac via a USB cable or USB hub.
14. On each connected iPad, uninstall any existing versions of the secure browser.
15. In the Apple Configurator, under the Prepare tab, click **Prepare** at the bottom of the window. A confirmation message appears.

16. Click **Apply** in the confirmation message. Preparation starts and may take several minutes, after which the iPad restarts. The Apple Configurator displays progress messages during the prepare.

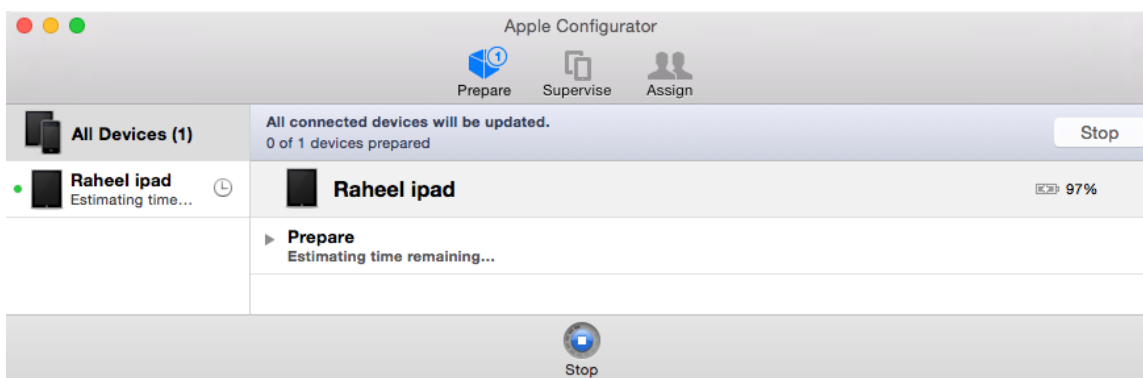

Note: iOS Upgrade Apple Configurator may force the iPads to upgrade to the latest version of iOS.

17. After the iPad restarts, follow the prompts on the iPad to configure it until the home screen appears.
18. *Optional:* Confirm the supervisory profile is installed on the iPad. Go to **Settings > General > Profiles**. The profile name you used in step [4](#) on page [31](#) appears under Configuration Profiles.
19. On the iPad, download and install the MDM profile you created in [Step 1: Creating a Mobile Device Management Profile](#).
20. After the MDM profile installation completes, install the secure browser onto the iPad. You can take a copy of the secure browser for iOS from <http://mt.portal.airast.org>. (Detailed instructions for installing the secure browser are in the section “Installing the Secure Browser on iOS” of the *Secure Browser Installation Manual*.)
21. *Optional:* After installation completes, test it by doing the following:
 - a. Open the Secure Browser.
 - b. Log in to a test site.
 - c. Select a test, have the TA approve the test.
 - d. Start the test. The iPad enters ASAM.
22. Repeat steps [13–21](#) to prepare additional iPads.
23. In the Apple Configurator, click **Stop** and close the Apple Configurator.


Setting the iPad into ASAM is complete. When a student starts a test, the iPad enters ASAM mode.

Removing the Emoji Keyboard

Emoticons are characters that express an emotion or represent a facial expression, such as a smile or a frown. Some text messaging apps replace sequences of characters with an emoticon, such as replacing :-) with ☺.


iOS has an Emoji keyboard that contains emoticons. This keyboard, if activated, can be confusing for test-takers or scorers. Use the following procedure to remove the emoji keyboard from an iOS device.

Figure 3. Emoji Keyboard

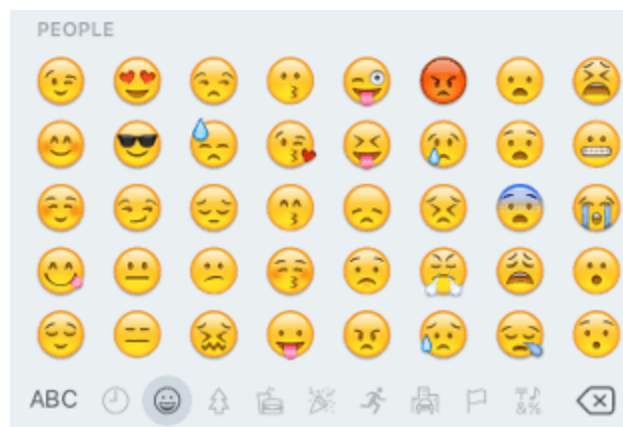

To remove the Emoji keyboard:

1. Tap **Settings**.
2. Navigate to **General > Keyboard**.
3. Tap **Keyboards**.
4. Delete Emoji from the list by sliding it to the left.

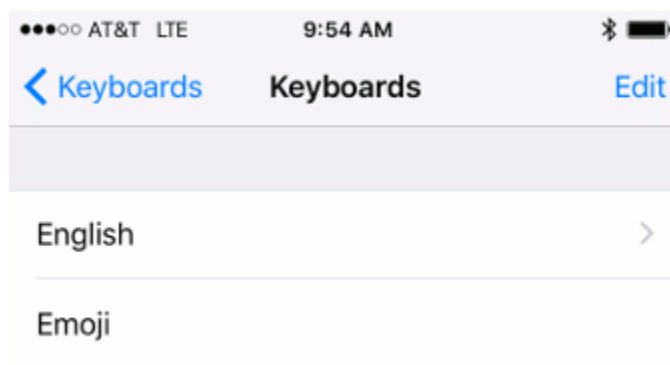

Enabling the Secure Browser Keyboard on Android

The default keyboard for the Android allows predictive text, which may provide students with hints for answers to tests. For this reason, the secure browser for Android requires that a mobile secure browser keyboard be configured for the secure browser itself. The secure browser keyboard is a basic keyboard, with no row for predictive text functionality.

The first time you open the Mobile Secure Browser on an Android tablet, you will be prompted to select the secure browser keyboard.



About the Secure Browser Keyboard and General Settings

Once the secure browser keyboard is set, it becomes the default keyboard for all Android tablet applications, not just for the secure browser. If you want to return to the default Android keyboard after using the secure browser, you will need to navigate to Settings > Language & Input and uncheck the secure browser keyboard.


If you change back to the default Android keyboard, you will be prompted to select the secure browser keyboard the next time you open the secure browser. The secure browser will not allow you to access the student login page until the secure browser keyboard has been selected.

The following procedure describes how to enable the secure browser keyboard. The screen shots were taken with a Samsung Galaxy Tab 2; other Android versions may vary.


1. Select the secure browser icon on the home screen.




2. A Change Keyboard message appears. Tap **Close**.

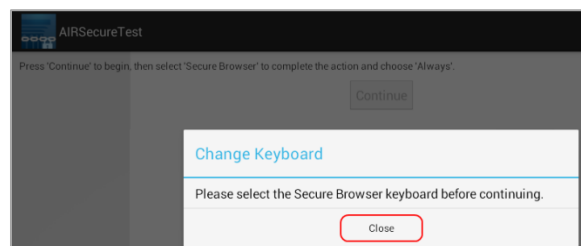


3. Tap **Set up input methods**. The Language and Input settings screen opens.

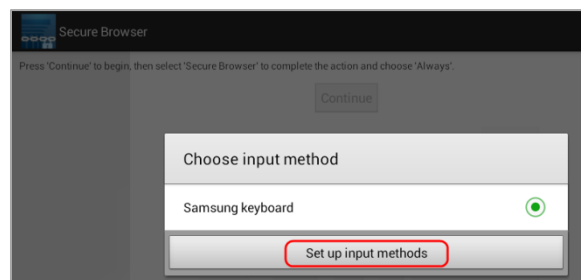

4. Select the checkbox next to AIRSecureTest so that a checkmark appears.
5. You will be prompted to acknowledge that this selection is okay. Select **OK** to continue.
Note: This action allows the mobile secure browser to use the secure browser keyboard.

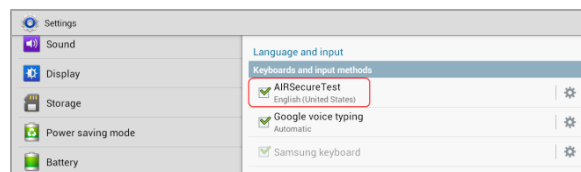


6. Navigate to the secure browser to open it.
(You can use the application switcher or go back to “Home” and select the secure browser icon.)

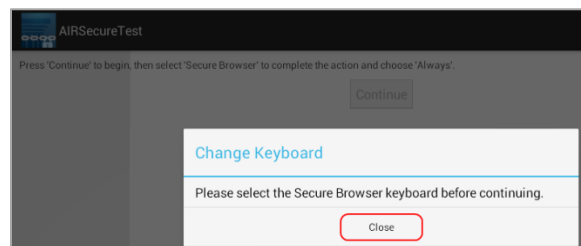


7. You will be prompted to change the keyboard. Select **Close**.

8. The Android tablet’s default keyboard will still be selected.

9. Select the checkmark or circle for the **AIRSecureTest** keyboard.

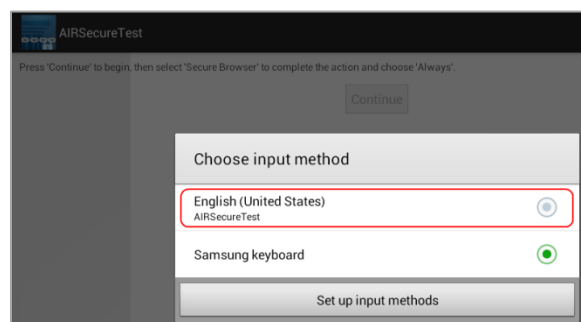

10. Select **Continue**. You will be prompted to complete the application launch using the preferred method.

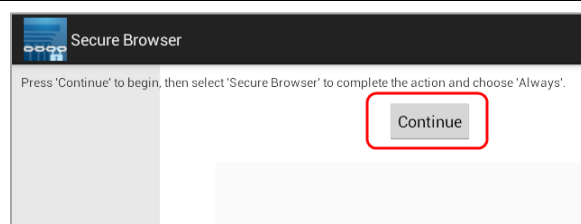


11. Select AIRSecureTest (ensure it is shaded and highlighted blue) and then select **Always**.



12. You will need to acknowledge that the secure browser’s default settings have changed. (This is a result of selecting the secure browser keyboard.)

13. Select **OK**.

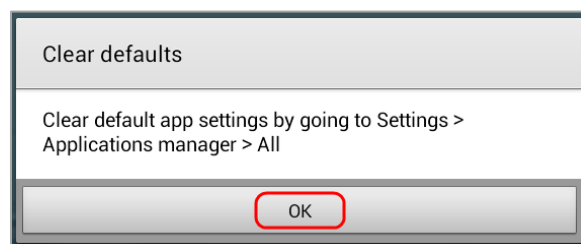

Installing CloudReady on PCs and Macs

CloudReady is a reduced-feature operating system, built on the same technology as Chrome OS, that runs on hardware with limited resources. If your school or district has older hardware that does not run newer versions of Windows or OS X, consider installing CloudReady on those machines. This installation can postpone or prevent a costly hardware upgrade.




Warning: Loss of data The procedure described in this section erases all data on the computer on which you are installing CloudReady. Be sure to back up all necessary data before starting this procedure.


To install CloudReady:

1. Ensure the computer on which you are installing CloudReady—
 - is one of the supported models listed in https://docs.google.com/document/d/1yPxKAmNFaJwk0kwikF5iROFMoxiinmkW_9KeI1u5jVo/edit?pli=1.
 - has a USB port.
 - can boot from a USB drive.
2. Purchase a Neverware license for the computer. Licenses are available from <http://www.neverware.com/>. (Bulk licenses may be available.)
3. If you received a USB drive from Neverware with the CloudReady image, proceed to step 18. Otherwise, prepare a bootable image by following steps 4 through 17. Ideally, perform these steps on a computer on which the Google Chrome web browser is already installed.
4. Obtain a blank 8 GB USB drive.
5. Install Google Chrome if it is not already installed.
6. In a web browser, go to the URL for the image file provided to you by Neverware. This URL downloads a file with a name similar to `cloudready_site646.bin`. Note the location of the file on your computer.
7. Insert the USB drive into the computer.
8. Start Chrome, and navigate to the Chrome web store at <https://chrome.google.com/webstore/>.


9. Search for the app *Chromebook Recovery Utility*.

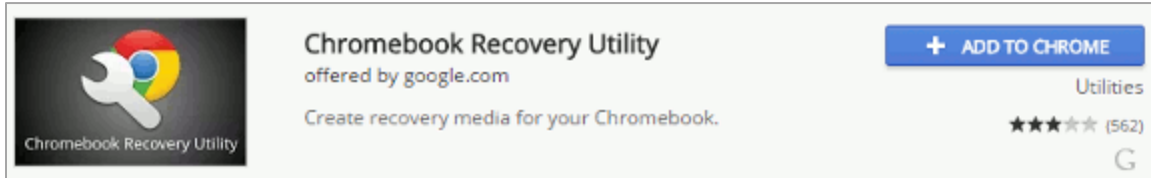

10. Click **ADD TO CHROME**, and in the conformation prompt click **Add app**.
11. After installation, click **Launch App**.
12. Click ⚙ in the top-right corner and select **Use local image**.

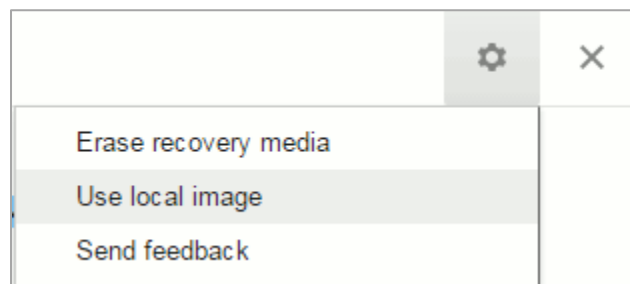

13. Navigate to the file image file that you downloaded in step 6.
14. In the next screen, select the USB drive you inserted in step 7.

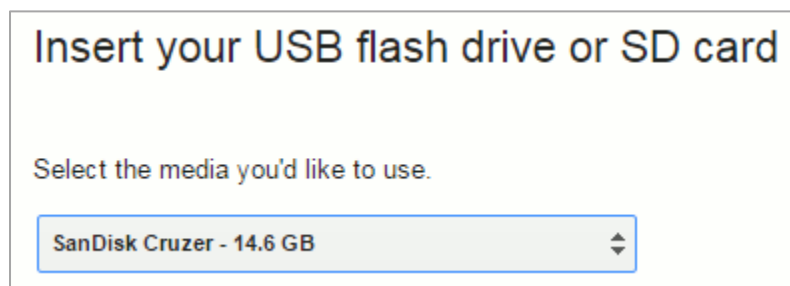

15. Click **Continue**.
16. In the next screen, click **Create Now**. The recovery utility creates a bootable image of CloudReady onto the USB drive. This operation takes 15–30 minutes.
17. When copying is complete, eject the USB drive from the computer.
18. On the computer where you are installing CloudReady, do the following:
- Back up all files you want to save. The installation procedure erases all data on the computer.

- b. Boot the computer from the USB drive. Booting and installation take 10–15 minutes, depending on your hardware. When the installation is complete, your computer turns off.
- c. Remove the USB drive, and power on the computer.
- d. Install the AIRSecureTest Kiosk App; see the *Secure Browser Installation Guide* for details.

Configurations for Braille Requirements

For information about configuring operating systems and software for Braille testing, see the *Braille Requirements* document, which is available on the Montana Comprehensive Assessment System portal (<http://mt.portal.airast.org>).

Section IV. Text-to-Speech Requirements

This section contains information about text-to-speech requirements.

Overview of Text-to-Speech

Using text-to-speech requires at least one voice pack to be installed on testing computers.

A number of voice packs are available for desktop computers, and AIR researches and tests voice packs for compatibility with the secure browsers. Additionally, not all voice packs that come pre-installed with operating systems are approved for use with online testing. The voice packs listed at the end of this section have been tested and are whitelisted by the secure browser.

Using Text-to-Speech

Students using text-to-speech for the practice tests must log in using a supported secure browser. Students can also verify that text-to-speech works on their computers by logging in to a practice test session and selecting a test for which text-to-speech is available.



Note: We strongly encourage schools to test the text-to-speech settings before students take operational tests. You can check these settings through the diagnostic page. From the student Practice and Training Site test login screen, click the **Run Diagnostics** link, and then click the **Text-to-Speech Check** button.

How the Secure Browser Selects Voice Packs

This section describes how AIR's secure browsers select which voice pack to use.

Voice Pack Selection on Desktop Versions of Secure Browsers

When a student who is using text-to-speech starts a test, the secure browser looks for voice packs on the student's machine. Upon recognizing an approved voice pack, the secure browser uses the one with the highest priority.

If any of the approved voice packs has also been set as the default voice on the computer, then that voice pack will always get the highest priority.

Voice Pack Selection on Mobile Versions of Secure Browsers

The mobile secure browser uses either the device's native voice pack or a voice pack embedded in the secure browser. Additional voice packs downloaded to a mobile device are not recognized by the mobile secure browser. [Table 8](#) lists the voice packs used by mobile versions of the secured browser.

Table 8. Voice Packs on Mobile Versions of the Secure Browser

| Platform | Voice Pack Used by Secure Browser |
|-------------|-----------------------------------|
| iOS 7.0–9.2 | Native iOS voice pack. |
| Android | Native Android voice pack. |
| Chrome OS | Native Chromebook voice pack. |

About NeoSpeech Voice Packs for Windows

Pursuant to an agreement between NeoSpeech and the American Institutes for Research (AIR), authorized users may download and install specific licensed NeoSpeech voice packs for use on supported Windows computers (Windows XP Service Pack 3, Vista, 7, 8.0, and 8.1).

These voice packs can be used instead of the default Windows voice packs for English and the commercial Spanish voice packs from Cepstral. (The default Windows voice packs as well as the Cepstral voice packs for Windows may still be used for text-to-speech, if desired.)

- The Julie voice pack is for English text-to-speech users.
- The Violeta voice pack is for Spanish text-to-speech users.

The NeoSpeech voice pack is to be used only in conjunction with, and not separate from, the online assessments provided by AIR's Test Delivery System.


The NeoSpeech voice packs can be downloaded from TIDE. Installation instructions are also available in TIDE.

Configuring Windows Text-to-Speech Settings


This section explains how to configure Windows for using text-to-speech with the secure browser. The text-to-speech feature is available on Windows versions as listed in the *System Requirements* document.

The instructions in this section are for Windows 7. The process is similar for other versions of Windows.

1. Open the Control Panel window, and select **Speech Recognition**.
2. In the Speech Recognition window, select **Text to Speech**.

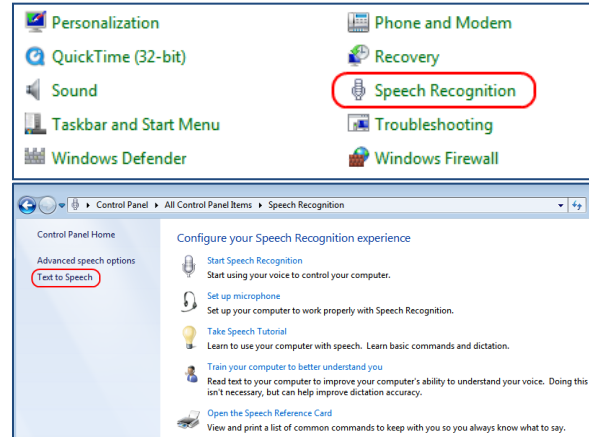

3. Configure default text-to-speech preferences.
 - a. *Voice selection*: If multiple voice packs are available, select the default voice.
 - b. Select **Preview Voice** to see whether the selected voice requires a rate adjustment.
 - c. *Voice speed*: If necessary, adjust the voice speed. Drag the slider to make the voice speak slower or faster. To listen to the rate, select **Audio Output**.
 - d. When you are done, click **OK** to save your settings and then close the Speech Properties window.

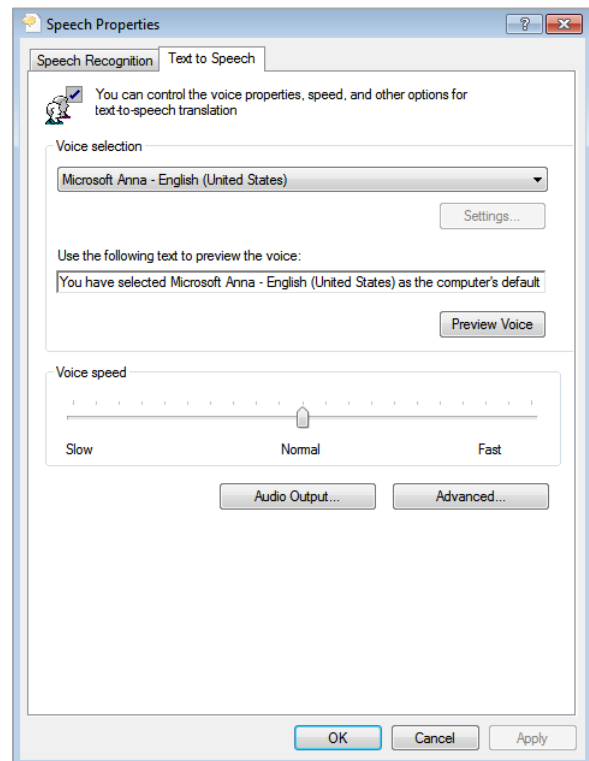


Configuring OS X Text-to-Speech Settings

This section explains how to configure Mac OS X for using text-to-speech with the secure browser. The text-to-speech feature is available on OS X versions as listed in the *System Requirements* document.

The instructions in this section are for OS X 10.9. The process is similar for other versions of OS X.

1. Open System Preferences, and select **Dictation & Speech**.

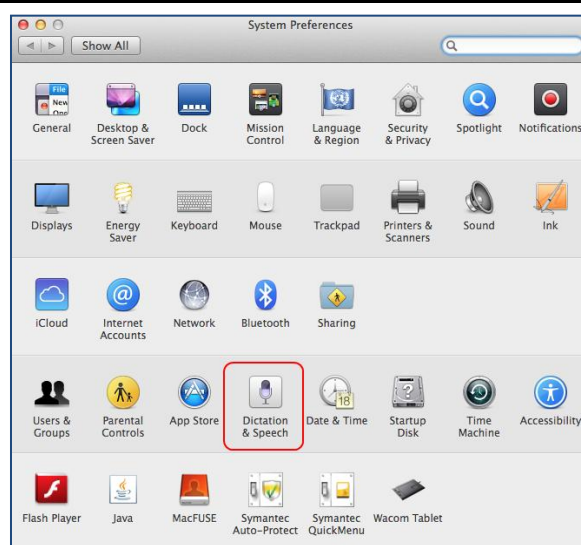

2. In the Text to Speech section, configure your default text-to-speech preferences.
 - *System Voice*: If multiple voice packs are available, select the default voice.
 - Select **Play** to see whether the selected voice requires a rate adjustment.
 - *Speaking Rate*: If necessary, adjust the voice speed. Drag the slider to make the voice speak slower or faster. To listen to the rate, select **Play**.
 - When you are done, click the red **X** in the upper left corner to save your settings and close the Speech window.



Configuring Linux Text-to-Speech Settings

This section explains how to install voice packs on the supported Linux distributions. This installation is necessary only for versions 8.0 or earlier of the Linux secure browser.

1. Install Festival for text-to-speech:

- Ubuntu: `sudo apt-get install festival`
- Fedora, RedHat: `yum install festival`
- openSUSE: `zypper install festival`

2. Install SoX for text-to-speech:

- Ubuntu: `sudo apt-get install sox`
- Fedora, RedHat: `yum install sox`
- openSUSE: `zypper install sox`

3. Using [Table 9](#) as a reference, install voice packs from the indicated packages. (These are the supported voice packs.)

Table 9. Packages that Include Supported Voice Packs on Linux Distributions

| Distribution/Voice Pack | Available in Package |
|---|-------------------------------------|
| Ubuntu | |
| kal_diphone (Kevin American English male) | festvox-kallpc16k, festvox-kallpc8k |
| ked_diphone (Kurt American English male) | festvox-kdlpc16k, festvox-kdlpc8k |
| el_diphone (Castilian Spanish male) | festvox-ellpc11k |
| openSuse | |
| kal_diphone (Kevin American English male) | (included in festival) |
| Fedora, RedHat | |
| cmu_us_awb_arctic_hts (Scottish English male) | festvox-awb-arctic-hts |
| cmu_us_bdl_arctic_hts (American English male) | festvox-bdl-arctic-hts |
| cmu_us_jmk_arctic_hts (Canadian English male) | festvox-jmk-arctic-hts |
| kal_diphone (Kevin American English male) | festvox-kal-diphone |
| ked_diphone (Kurt American English male) | festvox-ked-diphone |

Text-to-Speech and Mobile Devices

Text-to-speech (TTS) includes a feature that allows students to pause and then resume TTS in the middle of a passage. The pause feature does not work on mobile devices. Consequently, consider testing students who require TTS on desktop or laptop computers.

Voice Packs Recognized by Desktop Secure Browsers

The tables in this section display the voice packs for each desktop operating system (Windows, Mac, and Linux) that are currently recognized by the secure browser.

Windows and Mac OS X computers are typically shipped with at least one default voice pack. Many of these default voice packs are recognized by the secure browser.

Voice Packs for Windows

Table 10. Voice Packs Recognized by Secure Browsers—Windows

| Vendor | Voice Pack | Language |
|-------------------------|-----------------|----------|
| Windows (pre-installed) | Julie | English |
| Windows (pre-installed) | Kate | English |
| Windows (pre-installed) | Michael | English |
| Windows (pre-installed) | Michelle | English |
| Windows (pre-installed) | MSAnna | English |
| Windows (pre-installed) | MS_EN-GB_HAZEL | English |
| Windows (pre-installed) | MS_EN-US_DAVID | English |
| Windows (pre-installed) | MS_EN-US_ZIRA | English |
| Windows (pre-installed) | MSMary | English |
| Windows (pre-installed) | MSMike | English |
| Windows (pre-installed) | MSSam | English |
| Windows (pre-installed) | Paul | English |
| Windows (pre-installed) | Violeta | Spanish |
| Cepstral (commercial) | Cepstral_David | English |
| Cepstral (commercial) | Cepstral_Marta | Spanish |
| Cepstral (commercial) | Cepstral_Miguel | Spanish |
| NeoSpeech (commercial) | VW Julie | English |
| NeoSpeech (commercial) | VW Violeta | Spanish |

Voice Packs for OS X

Table 11. Voice Packs Recognized by Secure Browsers—OS X

| Vendor | Voice Pack | Language |
|----------------------|-------------------------|----------|
| Mac (pre-installed) | Agnes | English |
| Mac (pre-installed) | Alex | English |
| Mac (pre-installed) | Bruce | English |
| Mac (pre-installed) | Callie | English |
| Mac (pre-installed) | David | English |
| Mac (pre-installed) | Fred | English |
| Mac (pre-installed) | Jill | English |
| Mac (pre-installed) | Junior | English |
| Mac (pre-installed) | Kathy | English |
| Mac (pre-installed) | Princess | English |
| Mac (pre-installed) | Ralph | English |
| Mac (pre-installed) | Samantha | English |
| Mac (pre-installed) | Tom | Spanish |
| Mac (pre-installed) | Vicki | English |
| Mac (pre-installed) | Victoria | English |
| Mac (pre-installed) | Diego | Spanish |
| Mac (pre-installed) | Javier | Spanish |
| Mac (pre-installed) | Marta | Spanish |
| Mac (pre-installed) | Monica | Spanish |
| Mac (pre-installed) | Paulina | Spanish |
| Infovox (commercial) | Heather Infovox iVox HQ | English |
| Infovox (commercial) | Rosa Infovox iVox HQ | Spanish |

Voice Packs for Linux

For a listing of the voice packs supported by secure browsers on Linux, see [Table 9](#).

Appendix A. URLs Provided by AIR

This appendix presents information about the URLs that AIR provides. Ensure your network's firewalls are open for these URLs.

URLs for Non-Testing Sites

Table 12 lists URLs for non-testing sites, such as Test Information Distribution Engine, Online Reporting System, and Teacher Hand-Scoring System.

Table 12. AIR URLs for Non-Testing Sites

| System | URL |
|--|---|
| Portal and secure browser installation files | https://mt.portal.airast.org |
| Single Sign On System | https://mp.sso.airast.org |
| Test Information Distribution Engine | https://mp.tide.airast.org |
| Online Reporting System | https://mt.reports.airast.org |
| Teacher Hand-Scoring System | https://mt.tss.airast.org |

URLs for Testing Sites

Testing sites provide test items as well as support services such as dictionaries and thesauruses.

TA and Student Testing Sites

Testing servers and satellites may be added or modified during the school year to ensure an optimal testing experience. As a result, AIR strongly encourages you to whitelist at the root level. This requires using a wildcard.

Table 13. AIR URLs for Testing Sites

| System | URL |
|------------------------------|--|
| TA and Student Testing Sites | *.airast.org *.tds.airast.org *.cloud1.tds.airast.org *.cloud2.tds.airast.org |

Online Dictionary and Thesaurus

Some online assessments contain an embedded dictionary and thesaurus provided by Merriam-Webster. The Merriam-Webster URLs listed in [Table 14](#) should also be whitelisted to ensure that students can use them during testing.

Table 14. AIR URLs for Online Dictionaries and Thesauruses

| Domain Name | IP Address |
|---------------------------|----------------|
| media.merriam-webster.com | 64.124.231.250 |
| www.dictionaryapi.com | 64.124.231.250 |

Appendix B. Technology Coordinator Checklist

This checklist can be printed out referred to during review of networks and computers used for testing.

| | Activity | Estimated Time to Complete | Target Completion Date | Reference |
|--------------------------|--|----------------------------|--|---|
| <input type="checkbox"/> | Verify that all of your school's devices that will be used for online testing meet the operating system requirements. | 5–10 hours | 3–4 weeks before testing begins in your school | <i>System Requirements</i> |
| <input type="checkbox"/> | Verify that your school's network and Internet are properly configured for testing, conduct network diagnostics, and resolve any issues. | 5–10 hours | 3–4 weeks before testing begins in your school | Network Configuration and Testing |
| <input type="checkbox"/> | Install the secure browser on all devices that will be used for testing. | 5–10 hours | 3–4 weeks before testing begins in your school | <i>Secure Browser Installation Manual</i> |
| <input type="checkbox"/> | Enable pop-up windows and review software requirements for each operating system. | 5–10 hours | 1–2 weeks before testing begins in your school | Software Configuration |
| <input type="checkbox"/> | On Windows computers, disable Fast User Switching. If a student can access multiple user accounts on a single computer, you are encouraged to disable the Fast User Switching function. | 5–10 hours | 1–2 weeks before testing begins in your school | Disabling Fast User Switching |
| <input type="checkbox"/> | On Mac 10.7–10.11 , disable Spaces in Mission Control. | 5–10 hours | 1–2 weeks before testing begins in your school | Disabling Exposé or Spaces |
| <input type="checkbox"/> | Install any required text-to-speech software on devices that will be used for testing and verify that installation. | 5–10 hours | 1–2 weeks before testing begins in your school | Text-to-Speech Requirements |
| <input type="checkbox"/> | On iPads , ensure that Guided Access or ASAM is enabled and that TAs know how to activate Guided Access. | 5–10 hours | 1–2 weeks before testing begins in your school | Configuring for Guided Access on iOS |
| <input type="checkbox"/> | On Android tablets, ensure that the secure browser keyboard is enabled. | 5–10 hours | 1–2 weeks before testing begins in your school | Enabling the Secure Browser Keyboard on Android |

Appendix C. Scheduling Online Testing

Number of Computers and Hours Required to Complete Online Tests

We recommend that schools arrange their computer resources to accommodate the number of students who will be testing at the same time for ease of test administration. The Sample Test Scheduling Worksheet below shows how to estimate the number of testing hours needed to administer one testing opportunity.



Note: This worksheet may need to be modified based on your network setup. You may want to work with your Test Administrator to adapt this worksheet as necessary so that you do not risk overloading your wired or wireless network.

Sample Test Scheduling Worksheet

For each school, enter the following for each online test:

Number of computers available for testing at once:

Number of students who need to take the test:

Number of Test Administrators who need a computer:

Estimated number of hours needed per student to complete the test. This estimate should include approximately 15 minutes for students to get set up and logged in as well as the average estimated time to complete the test.

Number of hours that must be scheduled to administer the test:
(students + TAs) x hours ÷ computers =

Example:

- School A has a total of 60 student computers available for testing at once.
- 120 students in grade 5 will need to take the Math assessment.
- Number of hours needed to administer test: 120 students x 1 hour per student ÷ 60 computers = 2 hours (plus 15 minutes for setup).

Appendix D. User Support

The MontCAS Help Desk is open 6:00 A.M. to 3:00 P.M., Mountain Time (Monday – Friday) and 5:00 A.M. to 5:00 P.M., Mountain Time (Monday – Friday during the Summative Test Window).

Montana Help Desk

Toll-Free Phone Support: 1.888.792.2741

Email Support: MThelpdesk@measuredprogress.org

Please provide the Help Desk with a detailed description of your problem, as well as the following:

- Test Administrator name and IT/network contact person and contact information
- SSIDs of affected students
- Results ID for the affected student tests
- Operating system and browser version information
- Any error messages and codes that appeared, if applicable
- Information about your network configuration:
 - Secure browser installation (to individual machines or network)
 - Wired or wireless Internet network setup